

RTDSC

ELECTRONIC ROOM TEMPERATURE THERMOSTAT

Digital-control for wired control of heating



Overview

Main features

- Room temperature control
- Wired transmission of the set temperature and the measured temperature

Application

- Underfloor heating / cooling
- Electric radiator
- Ventilation device

Product + points

- **Sober design**, suitable for traditional or contemporary interiors
- **Practical**: the product has a small footprint
- **Wide display screen**, blue backlighting
- **Ergonomic settings**: 4 keys for intuitive use

Functional specifications

Use



| | |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Desired temperature | Adjustable from +5°C to +30°C, default setting : 21°C |
| Safety | <ul style="list-style-type: none"> - Child safety: keypad locking - Settings safety: <ul style="list-style-type: none"> - Restricted settings in respect of a minimum temperature setpoint - Restricted settings in respect of a maximum temperature setpoint |
| Display screen | Viewing of settings, of measured, set temperature and keypad locking |

Installation

Installation on a junction box

Connection to thermoelectric actuators or wiring box dedicated to underfloor heating/cooling system


Manual system test: override of the outputs (heating switched or put into heating standby mode)

Advanced settings

| | |
|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Language | English, French, Italian or German |
| Temperature unit | Degrees Celsius or degrees Fahrenheit |
| Regulation adjustment according to type of use | Can be used in conjunction with an underfloor heating/cooling system, a electric radiator or a ventilation system |
| Configuring the output according to thermoelectric actuators | Suitable for thermoelectric actuators NO (normally open at rest) or NC (normally closed at rest), (NC default) |
| Max. setpoint temperature | Preset to +30°C , adjustable from +5°C to +30°C |
| Min. setpoint temperature | Preset to +5°C , adjustable from +5°C to +30°C |
| Restoring factory settings | 5 secondes minimum to restor factory settings |

Expert settings

| | |
|-------------------------------|----------------------------|
| Temperature adjustment | Ambient sensor calibration |
|-------------------------------|----------------------------|

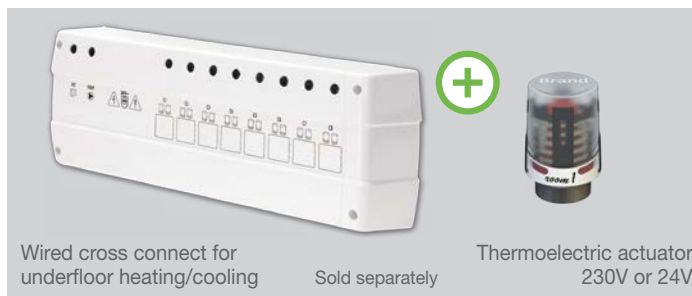

Technical specifications

Dimensional and finish specifications

| | |
|------------|----------------|
| Height | 99 mm |
| Width | 90 mm |
| Depth | 26 mm |
| Color | White RAL 9010 |
| Net weight | 0,2 Kg |

Power supply

| | |
|---------------------------|-------------------------------------------------------------------------------------------|
| Operating voltage | 24VAC or 230VAC +/-10%, 50Hz |
| Typical power consumption | 30mA |
| Electronic output ON/OFF | 24VAC +/- 10%, 50Hz, 0.7A max. or 230VAC +/-10%, 50Hz, 1A max |
| Connection | By means of clamp terminals for cables with 0.5 square mm to 1.5 square mm cross-sections |

Control

| | |
|--------------|-----|
| Control type | PID |
|--------------|-----|

Environment

| | |
|---------------------------|-------------------------------------|
| Protection rating | IP20 |
| Class | Class II |
| Operating temperature | 0°C to +40°C |
| Temperature setting range | +5°C to +30°C |
| Storage temperature | -10°C to +50°C |
| Max. humidity level | 85% at +25°C (without condensation) |

Applicable directives

| | 230V | 24V |
|------|------------|------------|
| EMC | 2014/30/EU | 2014/30/EU |
| LVD | 2014/35/EU | - |
| RoHS | 2011/65/EU | 2011/65/EU |

Applicable standards

| | |
|---------------|-----------------------------------|
| LVD | EN60730-1 ; EN60730-2-9 ; EN62311 |
| EMC | EN60730-1 ; EN60730-2-9 |
| RoHS | EN50581 |
| Manufacturing | On certified site ISO 9001 V2008 |

Product codes

| Codes | References |
|-----------|----------------------------------------------------|
| RTDSCIMHA | Wired digital-control thermostat, white, (230V AC) |
| RTDSCVMHA | Wired digital-control thermostat, white, (24V AC) |

Product customization (design features) possible. Please contact us.